





SPECIFICATION

MATERIAL:

Housing: PBT+30%G. F UL94V-0
 Contacts: Copper Alloy

ELECTRICAL:

Current rating: 2 Amps .
 Contact resistance: 20 mΩ initial
 Insulation resistance: 1000 MΩ min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC/minute
 Operating temperature: -55° C TO +125° C

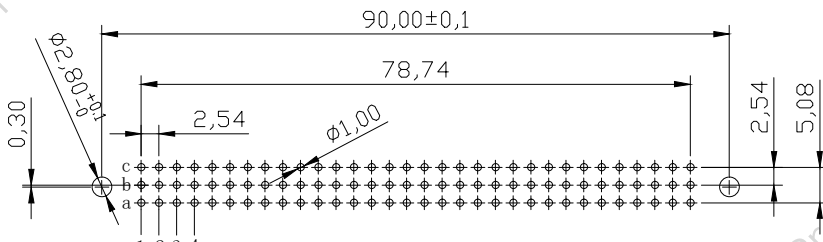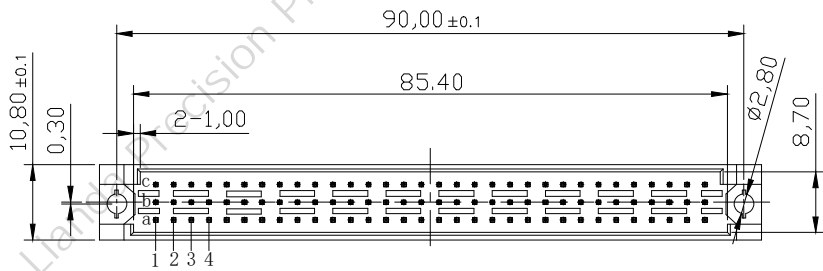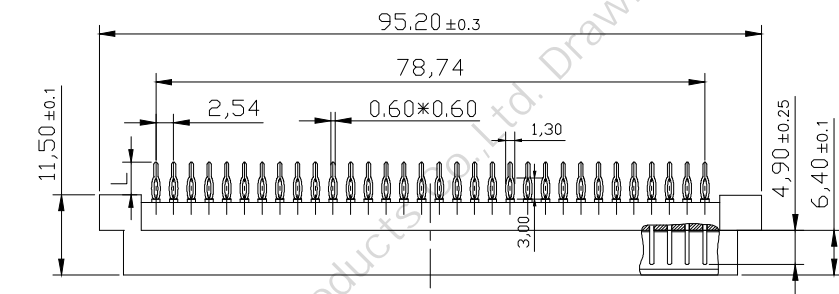

PCB LAYOUT(RECOMMENDED)
 (TOP VIEW TOL. :±0.05)

| Length | | 1 | |
|--------|----------|--------------------|-----------------|
| L | | 5.1 | |
| Pitch | Position | Rows with Contacts | Contact Arrange |
| 2.54mm | 96 | A B C | |
| | 64 | A - C | |
| | 32 | A - - | |
| 5.08mm | 48 | A B C | |
| | 32 | A - C | |
| | 16 | A - - | |

| 公差一览表 TOLERANCE UNLESS OTHERWISE | | | |
|-------------------------------------|--------------|-------|-------|
| X. | ±0.25 | X° | ±5° |
| .X | ±0.20 | .X° | ±2° |
| .XX | ±0.15 | .XX° | ±1° |
| .XXX | ±0.02 | .XXX° | ±0.5° |
| 日期 Date | 2009. 04. 15 | | |

**欧式插座DIN 41612 396直针公座
免焊接**

SPECIFICATION

MATERIAL:

Housing: PBT+30%G. F UL94V-0

Contacts: Copper Alloy

ELECTRICAL:




Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC/minute

Operating temperature: -55° C TO +125° C

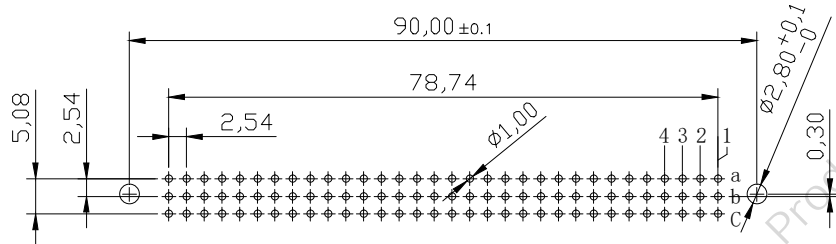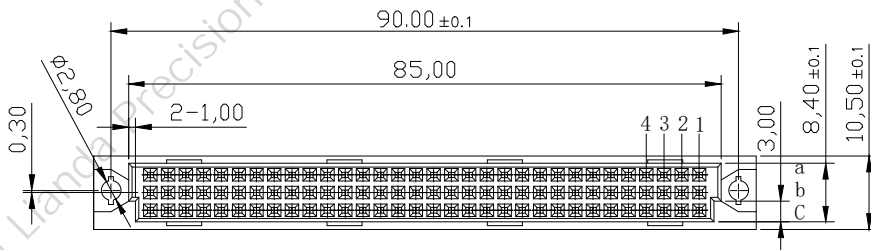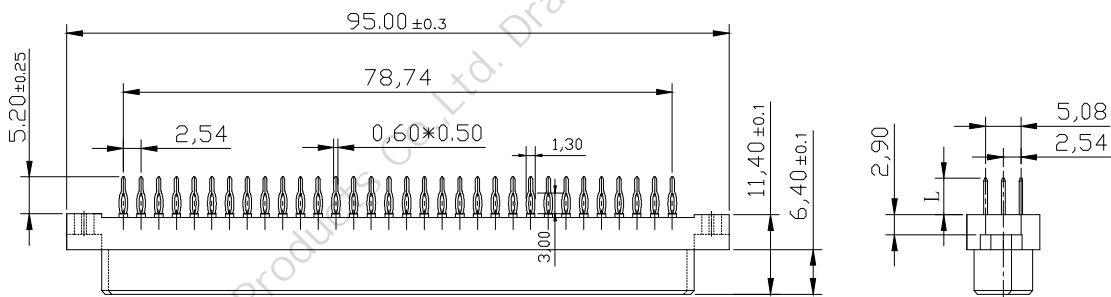

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. : ±0.05)

| Length | | 1 | |
|--------|----------|--------------------|-----------------|
| L | | 5.2 | |
| Pitch | Position | Rows with Contacts | Contact Arrange |
| 2.54 | 96 | A B C | |
| | 64 | A - C | |
| | 32 | A - - | |
| 5.08 | 48 | A B C | |
| | 32 | A - C | |
| | 16 | A - - | |

| 公差一览表 | | | |
|----------------------------|------------|-------|-------|
| TOLERANCE UNLESS OTHERWISE | | | |
| X. | ±0.25 | X° | ±5° |
| .X | ±0.20 | .X° | ±2° |
| .XX | ±0.15 | .XX° | ±1° |
| .XXX | ±0.02 | .XXX° | ±0.5° |
| 日期 Date | 2020.06.25 | | |

**欧式插座DIN 41612 396直针母座
免焊接**

SPECIFICATION

MATERIAL:

Housing: PBT+30%G. F UL94V-0

Contacts: Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC/minute

Operating temperature: -55° C TO +125° C

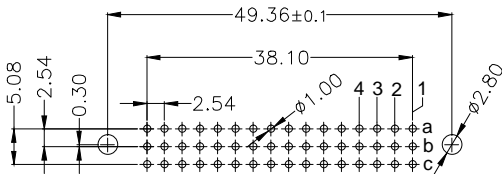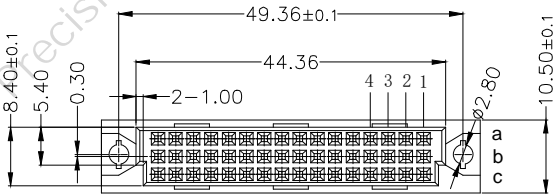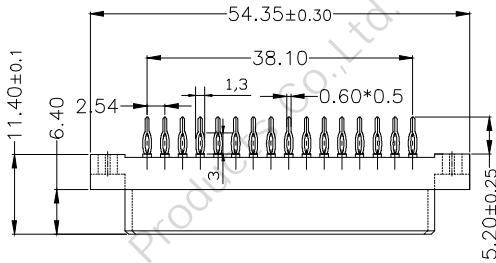

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

| Pitch | Length | 1 | Contact Arrange |
|-------|--------|-------|-----------------|
| | L | 5.2 | |
| 2.54 | 48 | A B C | |
| | 32 | A - C | |
| | 16 | A - - | |
| 5.08 | 24 | A B C | |
| | 16 | A - C | |
| | 8 | A - - | |

| 公差一览表 TOLERANCE UNLESS OTHERWISE | | | |
|-------------------------------------|--------------|-------|-------|
| X. | ±0.25 | X° | ±5° |
| .X | ±0.20 | .X° | ±2° |
| .XX | ±0.15 | .XX° | ±1° |
| .XXX | ±0.02 | .XXX° | ±0.5° |
| 日期 Date | 2009. 04. 15 | | |

**欧式插座DIN 41612 348直针母座
免焊接**