

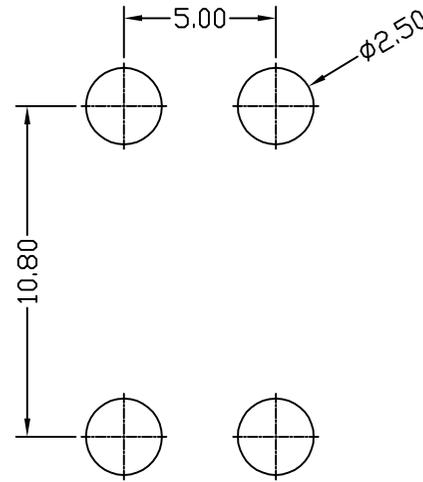
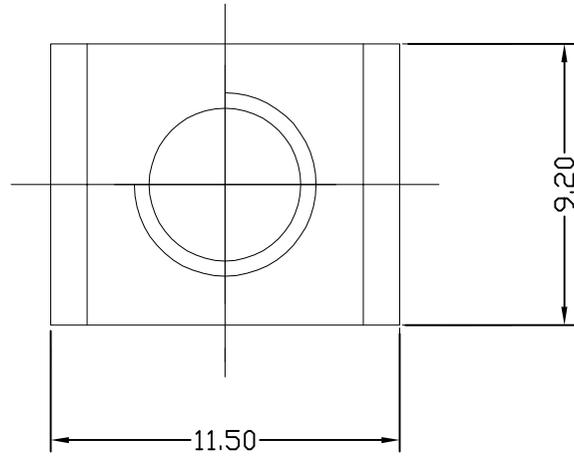


**HSF** RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	06/18-'24	KJL

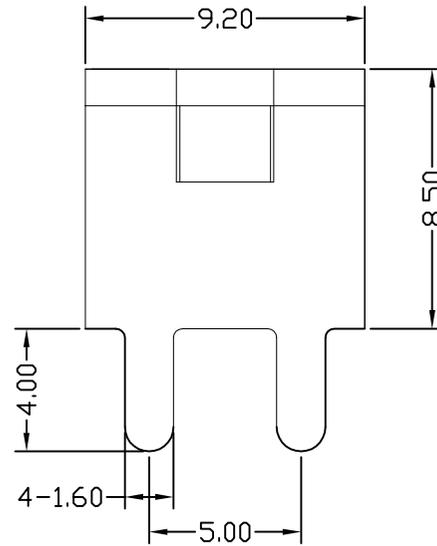

**PCB LAYOUT**

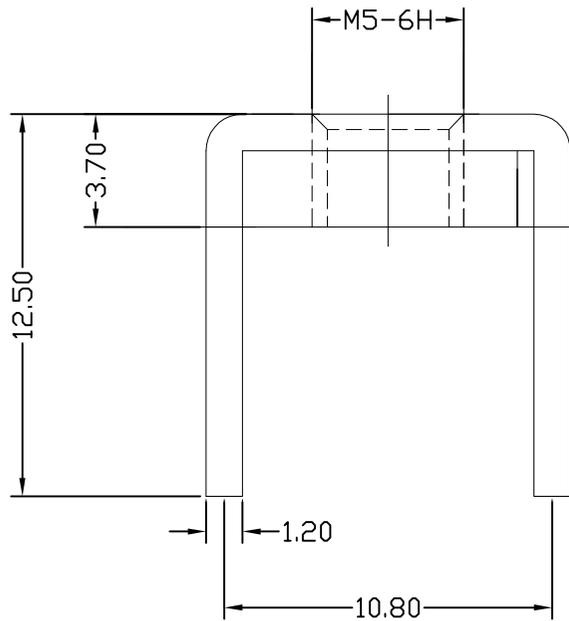

材料要求:

1. 插脚: H62
2. 垫片: SPCC

技术要求:

1. 电镀规格: 打铜底0.5~1um, 镍1~3um, 雾锡3~5um
2. 不得有变形, 毛刺等缺陷。
3. 无屑挤牙。
4. 螺纹扭力为 2.0N.m kgf.cm, 螺纹符合通止规要求;
5. 额定电流: 20A

### Ordering Information

LQT X XX X XXXX

Code	PIN Number	Packing	Serial No
M: MALE	1~99	A: PE Bag 袋装	0001~9999
F: FEMALE (不适用时0表示)	(总PIN数)	B: Tube 管装	
		C: Tray 盘装	
		D: Reel 卷装	
		E: Bag and Box 袋加盒	
		F: Other 其他	



**LD CONN 东莞连大精密制品有限公司**  
**DongGuan LianDa Precision Products Co., LTD**

TITLE	RP柳垫片直插脚(M5螺牙)H=6mm	DRAWN BY	KJL	06/18-'24
PART NO.	LQT002A0003	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

>120	±0.50		
>30~120	±0.30		
>6~30	±0.20		
0~6	±0.10	ANGLE	±1°

**HSF RoHS**

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	06/18-'24	KJL

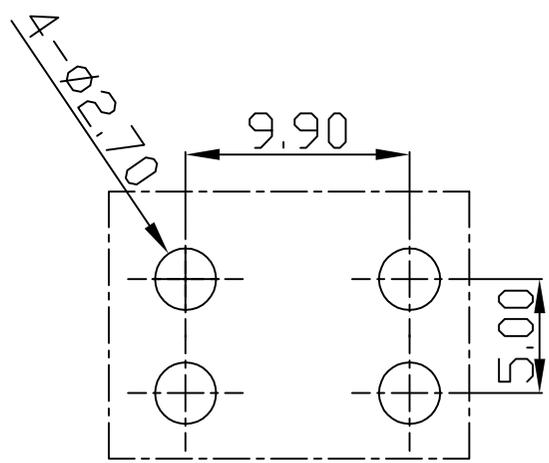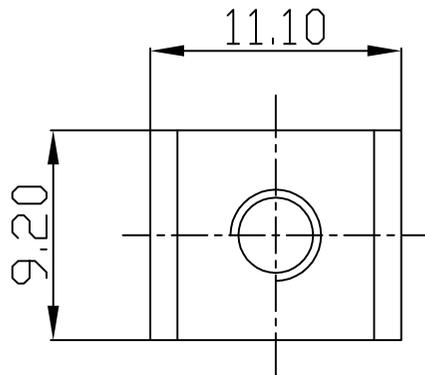

PCB. LAYOUT

材料要求:

1. 插脚: H62
2. 垫片: SPCC



技术要求:

1. 电镀规格: 打铜底0.5~1um, 镍1~3um, 雾锡3~5um
2. 螺纹扭矩Torque: 12 lbf-in, 螺纹符合通止规要求;
3. 盐雾要求: 24小时
4. 额定电流: 80A

### Ordering Information

LQT X XX X XXXX

Code	PIN Number	Packing	Serial No
M:MALE F:FEMALE (不适用时0表示)	1~99 (总PIN数)	A:PE Bag 袋装 B:Tube 管装 C:Tray 盘装 D:Reel 卷装 E:Bag and Box 袋加盒 F:Other其他	0001~9999

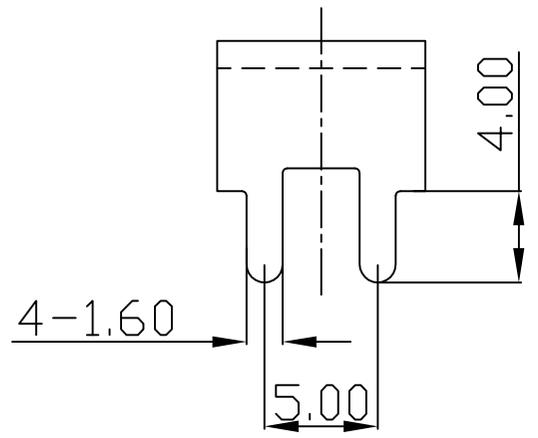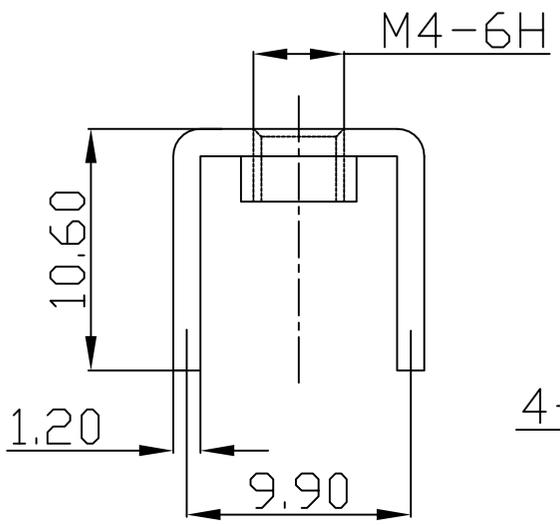


**LD CONN 东莞连大精密制品有限公司**  
**DongGuan LianDa Precision Products Co., LTD**

TITLE	抽牙直插脚 (M4螺牙) H=10mm	DRAWN BY	KJL	06/18-'24
PART NO.	LQT004A0012	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

>120	±0.50		
>30~120	±0.30		
>6~30	±0.20		
0~6	±0.10	ANGLE	±1°

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	06/18'24	KJL

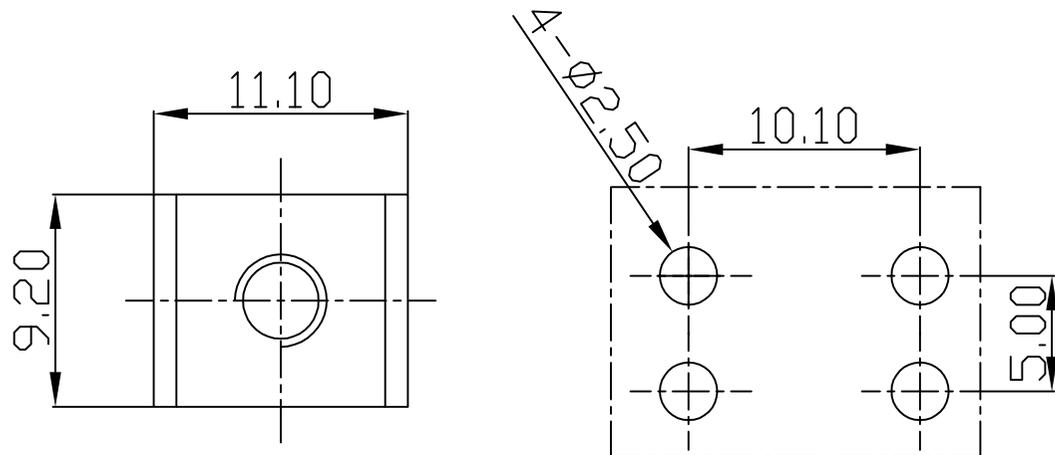

PCB. LAYOUT


材料要求:

- 1.材料:黄铜H62
- 2.垫片: SPCC
- 3.电镀,打铜底0.5~1um, 镍1~3um, 雾锡3~5um

Ordering Information

LQT X XX X XXXX

Code	PIN Number	Packing	Serial No
M:MALE F:FEMALE (不适用时0表示)	1~99 (总PIN数)	A:PE Bag 袋装 B:Tube 管装 C:Tray 盘装 D:Reel 卷装 E:Bag and Box 袋加盒 F:Other其他	0001~9999

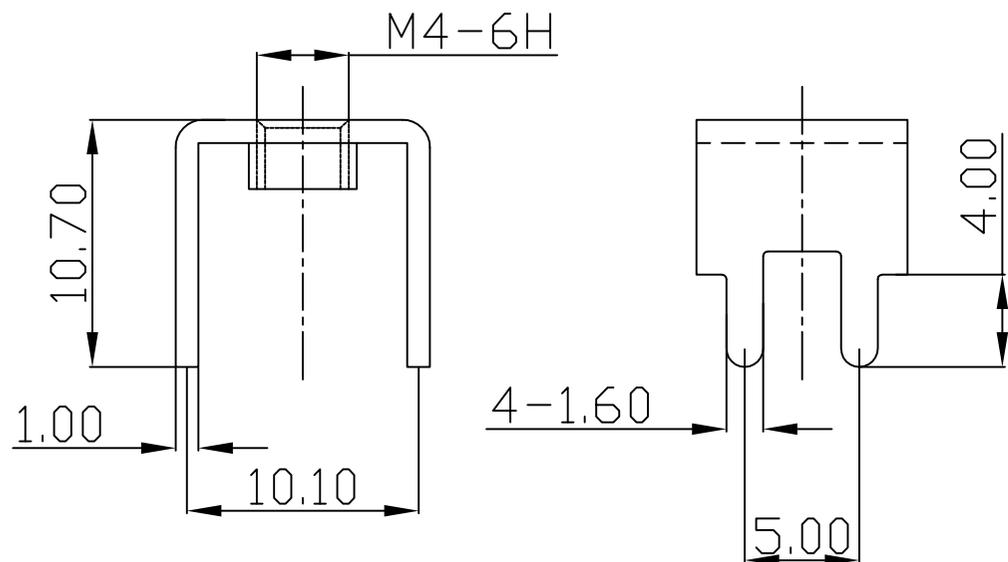

**LD CONN** 东莞连大精密制品有限公司  
 連大 DongGuan LianDa Precision Products Co., LTD



TITLE	抽牙直插脚端子(M4螺牙) H=10.7mm	DRAWN BY	KJL	06/18'24
PART NO.	LQT004A0013	CHECKED BY		
DRAWING NO.	—	APPROVED BY		

>120	±0.50		
>30~120	±0.30		
>6~30	±0.20		
0~6	±0.10	ANGLE	±1°



SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4
-------	-----	------	----	--	------	-----	------	----

**HSF** RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	06/18-'24	KJL

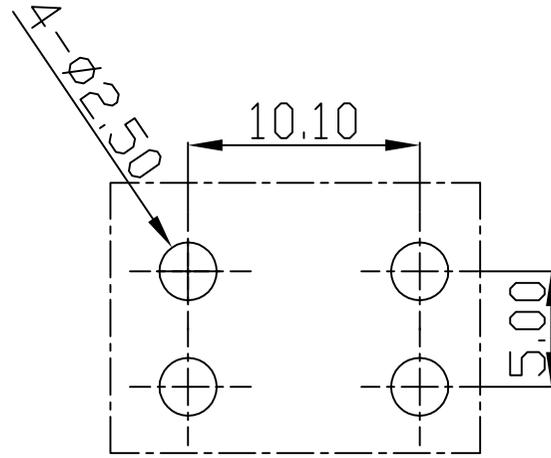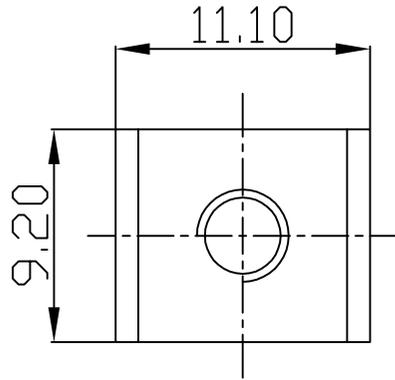

PCB. LAYOUT

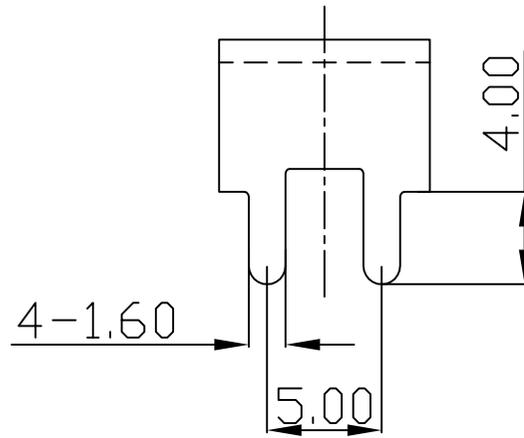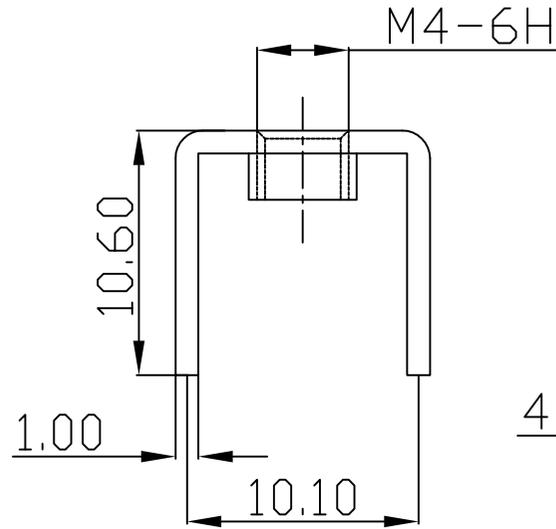

材料要求:

- 1.材料:黄铜H62
- 2.垫片: SPCC

技术要求:

- 1.电镀,打铜底0.5~1um, 镍1~3um, 雾锡3~5um
- 2.螺纹扭矩Torque: 12bf · in, 螺纹符合通止规要求;
- 3.盐雾要求: 24小时;
- 4.额定电流: 80A

### Ordering Information

LQT X XX X XXXX

Code	PIN Number	Packing	Serial No
M:MALE F:FEMALE (不适用时0表示)	1~99 (总PIN数)	A:PE Bag 袋装 B:Tube 管装 C:Tray 盘装 D:Reel 卷装 E:Bag and Box 袋加盒 F:Other其他	0001~9999

抽牙直插脚

**LDCONN 东莞连大精密制品有限公司**  
**DongGuan LianDa Precision Products Co., LTD**

TITLE	抽牙直插脚(M4螺牙)H=10.6mm	DRAWN BY	KJL	06/18-'24
PART NO.	LQT004A0014	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

>120	±0.50		
>30~120	±0.30		
>6~30	±0.20		
0~6	±0.10	ANGLE	±1°